


Sprzęgła zębate jednostronne hamulcowe typu ATg

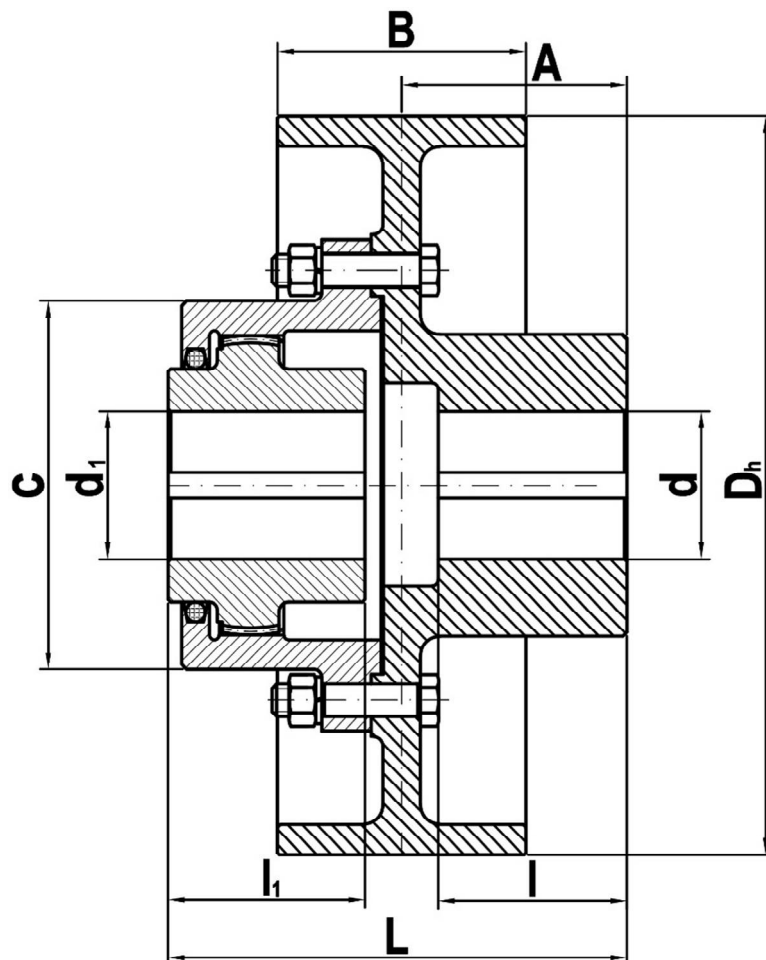

Nr rysunku	Wymiary							Waga kg
	Dh	A	B	c	L	Zakres wymiarów		
						d, d ₁	l, l ₁	
FS 011ATg	200	L+25	75	100	L= +l ₁ +36	20÷40	36÷110	12
FS 012ATg	250	L+23	90	100	L= +l ₁ +36	20÷45	36÷110	18,5
FS 013ATg	250	L+23	90	125	L= +l ₁ +36	30÷50	58÷110	23
FS 014ATg	320	L+23	110	125	L= +l ₁ +39	32÷60	58÷140	33
FS 015ATg	320	L+23	110	150	L= +l ₁ +39	38÷70	58÷140	42,5
FS 016ATg	400	L+23	135	150	L= +l ₁ +39	38÷70	58÷140	46
FS 017ATg	400	L+23	135	175	L= +l ₁ +39	50÷80	82÷170	74

Nr rysunku	Wymiary							Waga kg
	Dh	A	B	c	L	Zakres wymiarów		
						d, d ₁	l, l ₁	
FS 018ATg	500	L+23	170	330	L=l+l ₁ +39	50÷85	82÷170	109,5
FS 019ATg	630	L+18	220	330	L=l+l ₁ +41	65÷110	105÷210	187
FS 022ATg	500	L+18	170	330	L=l+l ₁ +41	65÷110	105÷210	135

Sposób zamawiania:

W zamówieniu należy podać nr rysunku, wymiary d, l, d₁, l₁, oraz rozmiar kanałka wpustowego

Przykładowo:

Sprzęgło hamulcowe zębate FS 017ATg d=50, l=140, d₁=60, l₁=140 kanałek wpustowy wg PN