


Krążek linowy typu CLs

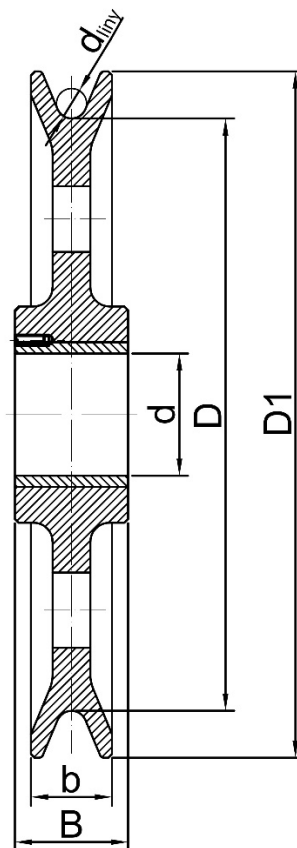

Nr rysunku	Wymiary mm							Waga kg
	D	D ₁	Wykonanie	Øliny	d	B	b	
FS 061CLs	100	120	B	5	20	35	18	1,2
			D			25		1,1
			F		25	20		1,0
			H			25		1,1
			J			30		1,1
FS 062CLs	125	150	B	5÷6	25	25	22	1,0
			D			30		0,9
			F		30	25		1,0
			H			30		1,8
FS 063CLs	125	150	B	5÷6	35	40	22	1,8
FS 064CLs	160	190	B	6÷8	20	30	28	2,5
			D		25	50		2,8
			F		30	30		2,5
FS 065CLs	160	190	B	6÷8	40	30	28	3,0
			D		45	30		3,0
FS 066CLs	200	235	B	7÷10	30	35	32	3,6
			D		30	55		4,1
			F		35	35		3,6
FS 067CLs	200	235	B	7÷10	50	35	32	4,2
			D		60	40		
			E		60	35		

Nr rysunku	Wymiary mm							Waga kg
	D	D ₁	Wykonanie	Øliny	d	B	b	
FS 068CLs	250	290	B	9÷12	30	45	36	6,0
			D		40	60		6,5
			F		40	40		5,5
FS 069CLs	250	290	B	9÷12	50	50	36	8,0
			D		60	60		8,5
			E		70	40		7,0
FS 070CLs	280	325	B	10÷14	35	50	39	10,2
			D		40			10,1
			F		50			10,0
FS 071CLs	280	325	B	10÷14	60	50	39	14,2
			D		60	70		17,1
			F		70	50		14,0
			G		90	45		12,7
FS 072CLs	315	365	B	12÷16	50	80	43	17,5
			D		55	55		14,5
			F		60	60		15,0
			H		60	80		17,0
			J		65	50		14,0
FS 073CLs	315	365	B	12÷16	80	60	43	16,8
			D		80	70		18,5
			E		100	50		10,7
FS 074CLs	355	415	B	13÷18	50	90	50	20,5
			D		60	60		16,0
			F		70	70		18,0
			H		70	80		19,0
FS 075CLs	355	415	B	13÷18	80	65	50	25,8
			D		90	60		24,3
			F		90	70		26,2
			H		100	80		27,8
			J		110	60		26,0
			K		130	60		24,3
FS 076CLs	400	465	B	14÷20	60	105	55	31
			D		65	80		27,5
			F		70	70		26,0
FS 077CLs	400	465	B	14÷20	90	70	55	32,7
			D		100	80		34,0
			E		140	65		27,6
FS 078CLs	450	520	B	16÷22	70	70	60	31,8
			D		80	75		31,8
			F		80	90		33,4
			H		90	80		31,5
			J		90	90		32,5
			L		90	100		33,4
FS 079CLs	450	520	B	16÷22	100	90	60	43,0
			D		100	110		47,8
			F		110	80		40,3
			G		150	70		44
FS 080CLs	500	575	B	18÷24	70	130	65	46,1
			D		80	75		36,2
			F		90	100		39,1
FS 081CLs	500	575	B	18÷24	100	100	65	44,6
			D		100	115		44,6
			F		110	80		40,1
			H		100	100		42,2

Nr rysunku	Wymiary mm							Waga kg
	D	D ₁	Wykonanie	Øliny	d	B	b	
FS 082CLs	500	575	B	18÷24	120	100	65	52,4
			D		130	100		51,1
			F		130	107		52,4
			G		170	80		40,9
FS 083CLs	560	640	B	20÷28	80	140	70	64,1
			D		90	90		54,2
			F		100	120		58,1
FS 084CLs	560	640	B	20÷28	120	110	70	54,2
			D		120	125		55,1
			F		130	110		52,4
FS 085CLs	560	640	B	20÷28	140	120	70	64,3
			D		150	110		60,1
FS 086CLs	560	640	B	20÷28	180	130	70	70,3
			C		190	85		57,1
FS 087CLs	630	720	B	24÷32	90	160	75	66
			D		100	100		54
FS 088CLs	630	720	B	24÷32	120	110	75	64
			D		140	110		61
			F		150	115		60
			H		150	110		59
FS 089CLs	630	720	B	24÷32	160	110	75	65
			D		160	130		69
			F		170	130		68
			H		170	140		70
			J		180	130		66
FS 090CLs	630	720	B	24÷32	200	130	75	114
			D		200	140		117
			E		230	95		93

Sposób zamawiania:

W zamówieniu należy podać nr rysunku i wykonanie krążka linowego.

Przykładowo:

Krążek linowy FS 078CLs wyk. A