


Zblocze hakowe 2-krążkowe

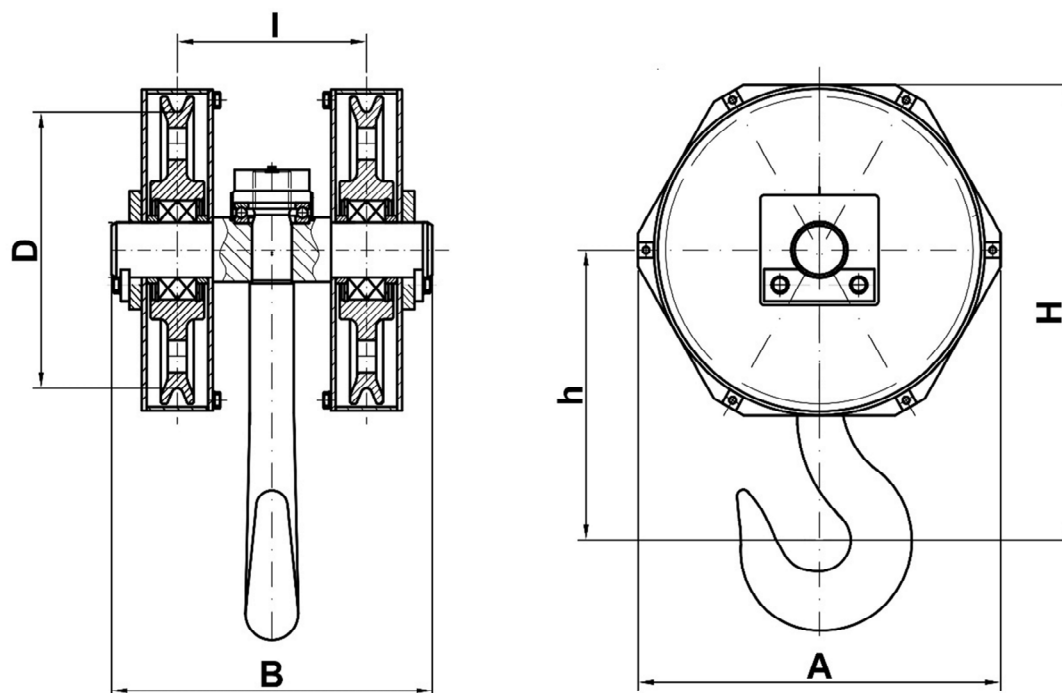

Nr rysunku	Wymiary [mm]								Waga kg
	Nr haka	D	A	B	H	Øliny	h	I	
FS 072DEb	4	280	395	326	505	10÷14	330	195	70
FS 073DEb	5	315	455	374	580	12÷16	380	234	90
FS 081DEb	5	315	455	374	580	12÷16	380	234	86
FS 074DEb	6	355	480	383	618	10÷14	400	234	110
FS 082DEb	6	355	465	383	618	10÷14	400	234	100
FS 094DEb	6	355	460	385	620	10÷14	400	236	110
FS 075DEb	8	355	510	403	675	10÷14	450	254	132
FS 083DEb	8	355	465	403	660	10÷14	450	254	104
FS 095DEb	8	355	465	407	665	10÷14	450	256	122
FS 076DEb	10	450	620	437	775	16÷22	500	276	220

Nr rysunku	Wymiary [mm]								Waga kg
	Nr haka	D	A	B	H	Øliny	h	l	
FS 084DEb	10	450	620	437	775	16÷22	500	276	180
FS 096DEb	10	450	615	437	775	16÷22	500	276	195
FS 077DEb	12	450	620	465	785	16÷22	510	288	260
FS 078DEb	16	500	680	515	900	18÷24	600	323	340
FS 098DEb	16	500	680	534	900	18÷25	600	330	348
FS 079DEb	20	560	770	602	1040	20÷28	700	385	505

Do zbloczy mogą być zastosowane haki: jednorożne, dwurożne, obrotowe lub nieobrotowe.

Sposób zamawiania:

W zamówieniu należy podać nr rysunku, rodzaj haka.

Przykładowo:

Zblocze 2-krążkowe dolne FS 096DEb, hak jednorożny nieobrotowy.